

NEG ARG FIBER

Continuous Roving

H-350Y Roving



H-350Y roving is multi-end assembled roving developed for higher strength of GRC at a low dosage of the glass fiber. Its strands are a high split type with a low strand tex. It can be used for spray-up and premix processes.

■ Product Number

AR2500H-350Y/S ----- 2500 tex
AR5000H-350Y/S ----- 5000 tex

■ Product Specifications

Type of glass ----- Alkali Resistant glass

Tensile strength (N/tex) ----- ≥ 0.245

Moisture content (%)* ----- ≤ 0.5

*Data measured by JIS (Japanese Industrial Standard)

■ DIBt Certificate

No. Z-3.72-1730

■ Process

Spray-up, Premix

■ Applications

Glassfiber Reinforced Concrete


■ Expected Effect

Disperses into strands and provides matrix reinforcement.

■ Packaging Data



Roving dimensions

- Inside diameter (d) ----- approx. 200 mm
- Outside diameter (D) --- approx. 275 mm
- Height (h) ----- approx. 270 mm
- nominal weight ----- 20.0kg



■ Palletizing Data

Number of packages / pallet	48
Number of layers	3
Number of packages / layer	16
Pallet dimensions (mm)	
Length (L)	1100
Width (W)	1100
Height (H)	970

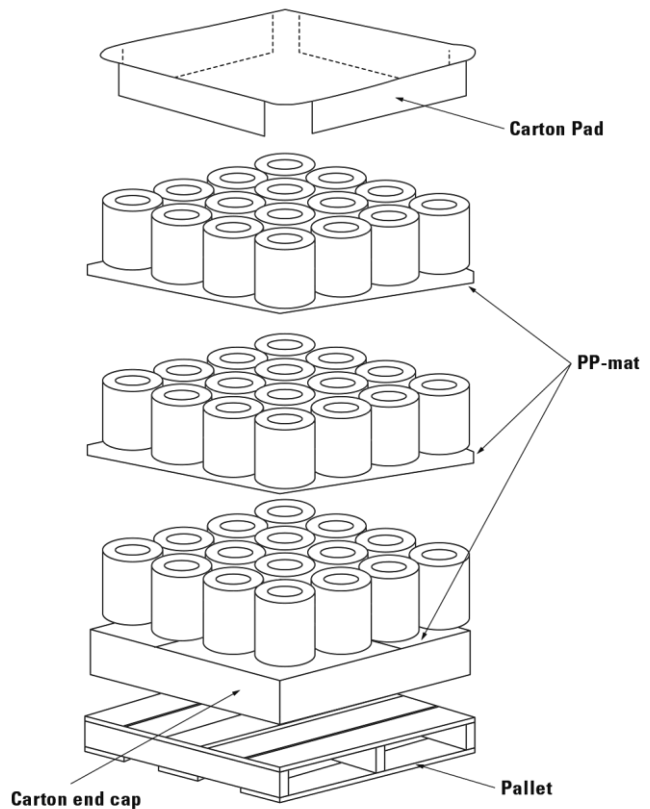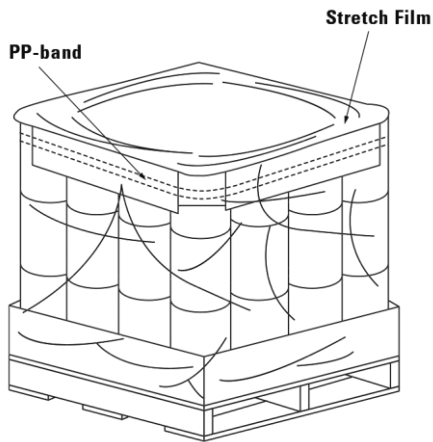

■ Storage Conditions

H-350Y Roving should be stored in an upright position in a dry area in its original packaging.
 H-350Y Roving should be sheltered from the direct sunlight.