

NEG ARG FIBER

Continuous Roving

H-530X Roving



H-530X roving is multi-end assembled roving specially developed for premix GRC to save transportation cost. It shows excellent chopping performance. Due to the high integrity of the strands it performs very well in a premix process. It can also be used for spray-up process.

■ Product Number

AR5000H-530X/S ----- 5000 tex

■ Product Specifications

Type of glass ----- Alkali Resistant glass

Tensile strength (N/tex) ----- ≥ 0.245

Moisture content (%)* ----- ≤ 0.5

*Data measured by JIS (Japanese Industrial Standard)

■ Process

Spray-up, Premix

■ Applications

Glassfiber Reinforced Concrete

■ Expected Effect

Disperses into strands and works for matrix reinforcement

■ Packaging Data


Roving dimensions

Inside diameter (d) ----- approx. 80 mm

Outside diameter (D) --- approx. 275 mm



Height (h) ----- approx. 270 mm

nominal weight ----- 20.0kg



■ Palletizing Data

Number of packages / pallet	48
Number of layers	3
Number of packages / layer	16
Pallet dimensions (mm)	
Length (L)	1100
Width (W)	1100
Height (H)	970

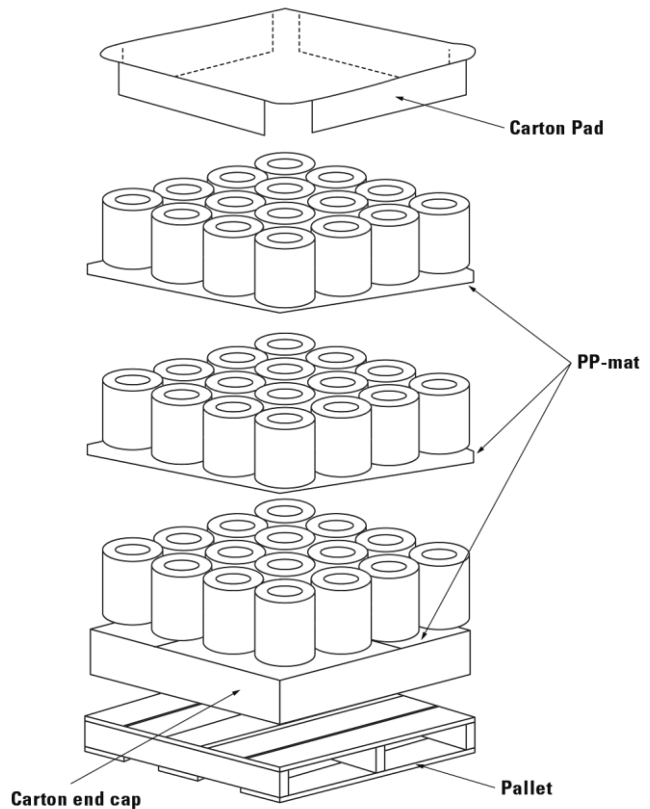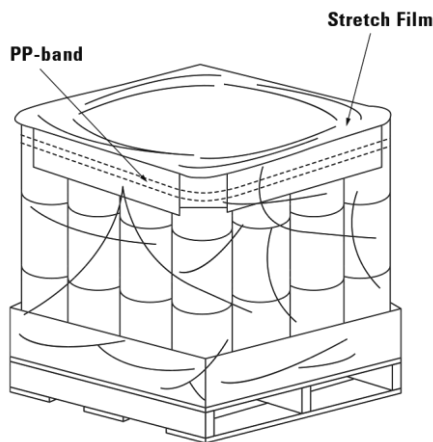

■ Storage Conditions

H-530X Roving should be stored in an upright position in a dry area in its original packaging.

H-530X Roving should be sheltered from the direct sunlight.