

NEG ARG FIBER

Continuous Roving

H-960 Roving



H-960 roving is multi-end assembled roving developed for excellent performance for GRC. It is especially for use with intricately shaped products in a spray-up process. The unique sizing system promotes conformity to the mold surface without bridging and creates a smooth surface.

■ Product Number

AR3000H-960/S ----- 3000 tex

■ Product Specifications

Type of glass ----- Alkali Resistant glass

Tensile strength (N/tex) ----- ≥ 0.245

Moisture content (%)* ----- ≤ 0.5

*Data measured by JIS (Japanese Industrial Standard)

■ Process

Spray-up

■ Applications

Glassfiber Reinforced Concrete

■ Expected Effect

Disperses into strands and works for matrix reinforcement.

■ Packaging Data


Roving dimensions

Inside diameter (d) ----- approx. 80 mm

Outside diameter (D) --- approx. 275 mm



Height (h) ----- approx. 270 mm

nominal weight ----- 20.0kg



■ Palletizing Data

Number of packages / pallet	48
Number of layers	3
Number of packages / layer	16
Pallet dimensions (mm)	
Length (L)	1100
Width (W)	1100
Height (H)	970

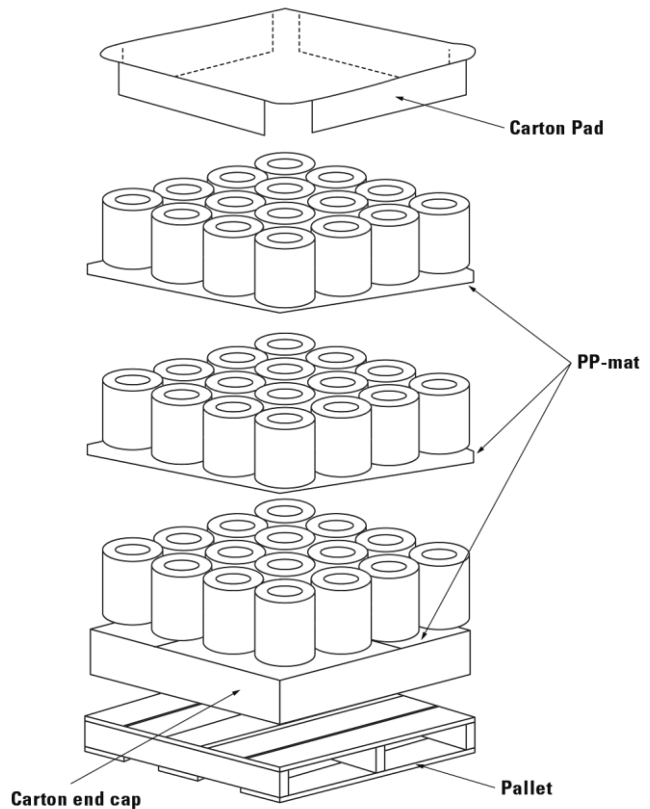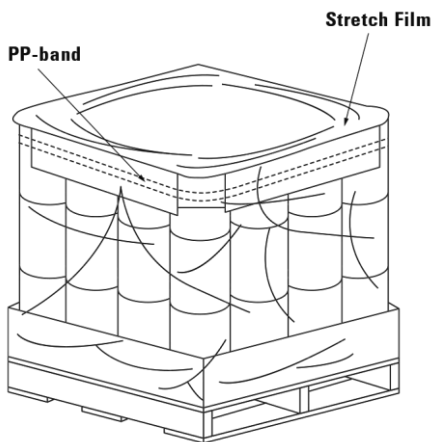

■ Storage Conditions

H-960 Roving should be stored in an upright position in a dry area in its original packaging.

H-960 Roving should be sheltered from the direct sunlight.