
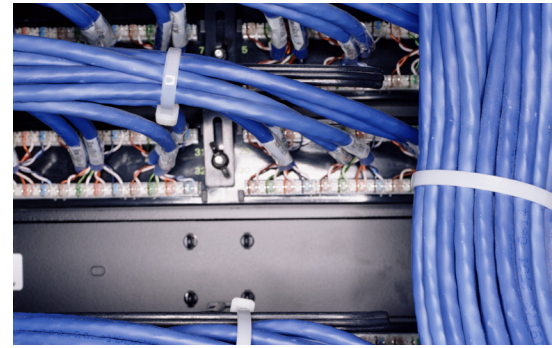


# ChopVantage® HP 3790

Chopped Fiber Glass

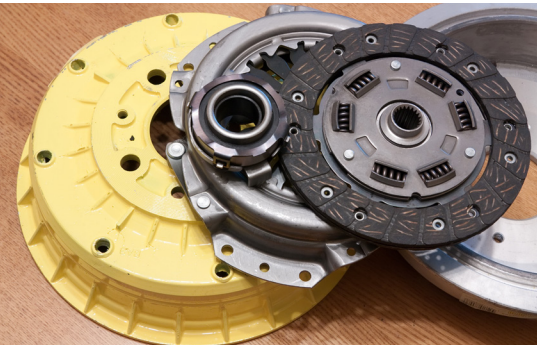

## Product Description

**CHOPVANTAGE HP 3790** chopped strands from NEG are designed for reinforcement of thermoplastic polyester. **CHOPVANTAGE HP 3790** contributes to high reinforcement properties in polybutylene terephthalate (PBT) and polyethylene terephthalate (PET) resins and in styrenic co-polymers, polycarbonate resins, polyoxymethylene (POM), and polyphenylenesulfide (PPS). End-use applications include transportation, electrical and electronic appliances, and computer housings and components.

## User Benefits

- Compatible with various resin systems, such as PBT, PET, POM and PPS.
- Superior dry flow performance which contributes to high compounding rates.
- Exhibits good strength retention after dry heat aging.
- Imparts high dielectric strength to PBT for electrical applications, such as connectors, fuse block holders and other non-current carrying components.
- Provides an optimum balance of sizing functions.
- Excellent color characteristics.
- Wide range of versatility with respect to feeding and handling.
- U.S. Food and Drug Administration and current EU compliance for repeated-use food contact applications.
- APE Free.
- Supported by NEG's extensive technical resources.
- Other packaging, including smaller quantities of product, available upon request.
- Manufacturing facilities operate quality management systems that comply with ISO 9001:2015 requirements.

## Packaging

- 1,000 kg Bulk Bag
- 612 kg (1,350 lb.) Corrugated Carton

## Product Information

Type of Fiber	E-Glass (ASTM D 578-05, Section 4.2.2)
Type of Sizing	Silane
Standard Cut Length (mm)	3.2
Average Fiber Diameter (µm)	13

## Storage

These products should be stored in a dry area with ambient temperature and relative humidity, optimally from 20°C to 25°C and between 50% and 70%, respectively. Protect product from all sources of water at all times. A First-In-First-Out (FIFO) stock control system is recommended to minimize the influence of storage conditions. Prior to use, products should be conditioned in the work area for a minimum of 24 hours. If contents of a package unit are partially used, the unit should be closed until the next use. With proper storage, there are no known limitations on the shelf life of the product. To insure optimal performance, retesting is recommended for products stored more than two years from the initial production date.

## Caution

To avoid the possibility of potential injury, maintain column stability by limiting pallet stacking to two (2) high as noted on individual shipping containers.

**NOTE:** This data is offered for informational purposes only in the selection of a composite reinforcement. The information contained in this bulletin is based on actual laboratory data. We believe that this information is reliable, but do not guarantee its applicability to the process of the user or assume any liability arising out of its use or performance. The user, by accepting the products described, agrees to be responsible for thoroughly testing any application to determine its suitability before committing to production. It is important for the user to determine the properties of its own commercial laminates when using this or any other reinforcement. *Because of numerous factors affecting the results, we make no warranty of any kind, expressed or implied, including those of merchantability and fitness for a particular purpose. Statements in this document shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law, safety code, or insurance regulation.*

## More Information

<http://www.neg.co.jp/inquiry/>

<http://www.neg.co.jp/en/inquiry/>

## Mechanical Properties

### Tensile Testing (ISO 527)

#### PBT

Tensile Strength (MPa)	= 105
Tensile Modulus (GPa)	= 8.5
Tensile Elongation (%)	= 3.0

### Charpy (ISO 179)

#### PBT

Charpy (unnotched) (kJ/m<sup>2</sup>) = 50

Glass Content by Weight (%) = 30

GLASS FOR FUTURE

